



Trapeza® 11.100.8



ArcelorMittal

Corrugated panel for cladding, partition and rain screen


Haironville (FR)

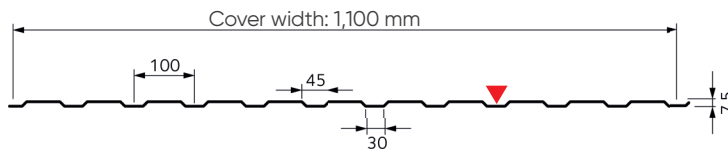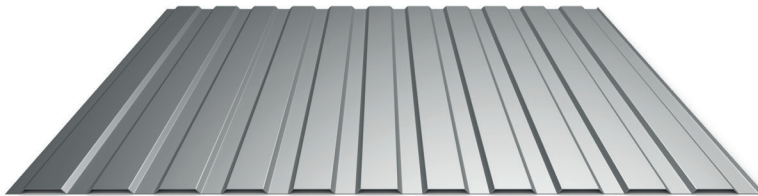

- Shorter lengths up to 200 mm are available on request. Minimum length 1,800 mm / Maximum length 11,000 mm
- Maximum length recommended for horizontal installation : 8,000 mm
- Minimum thickness for horizontal installation: 0.75 mm

Surface mass

Thickness (mm)	0.63	0.75	0.88	1.00
Mass (kg/m ²)	5.33	6.34	7.44	8.45



Overlap
For use as a cladding or intermediate skin of a thermo-acoustic complex.

Table of maximum permissible loads in kN/m² as a function of the working spans

For horizontal single skin installations, the span is limited to 1.5 m.
For a double skin installation, the span is limited to 1.5 m.

PV Veritas DLC L7 85 494

		2 SUPPORTS		Span (m)	3 SUPPORTS		
		Thickness (mm)			Thickness (mm)		
		0.63	0.75		0.63	0.75	
Single & double skin	Pressure	0.82	0.98	≤ 1.00	1.56	1.85	Pressure
	Underpressure	1.08	1.28		1.13	1.35	Underpressure
	Pressure	0.73	0.87	1.05	1.36	1.62	Pressure
	Underpressure	0.91	1.08		1.04	1.24	Underpressure
	Pressure	0.66	0.79	1.10	1.19	1.42	Pressure
	Underpressure	0.77	0.92		0.96	1.14	Underpressure
	Pressure	0.60	0.71	1.15	1.06	1.26	Pressure
	Underpressure	0.66	0.79		0.89	1.06	Underpressure
	Pressure	0.54	0.64	1.20	0.94	1.12	Pressure
	Underpressure	0.57	0.68		0.83	0.98	Underpressure
	Pressure	0.46	0.55	1.25	0.84	1.00	Pressure
	Underpressure	0.52	0.62		0.77	0.92	Underpressure
	Pressure		0.47	1.30	0.75	0.90	Pressure
	Underpressure		0.57		0.72	0.85	Underpressure
	Pressure			1.40	0.61	0.73	Pressure
	Underpressure				0.63	0.75	Underpressure
Pressure			1.50	0.51	0.61	Pressure	
Underpressure				0.56	0.66	Underpressure	
Single skin	Pressure			1.60		0.51	Pressure
	Underpressure					0.56	Underpressure

Span table according to French norms