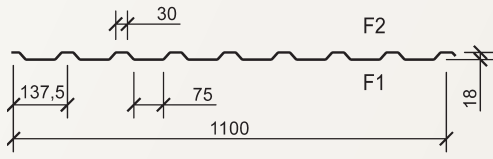

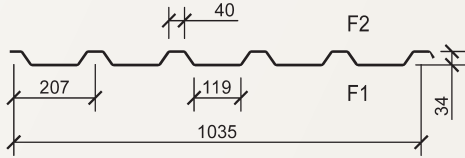

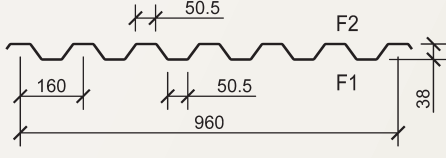

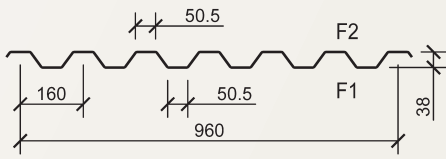



ArcelorMittal Construction Slovakia

Manufacturing program Senica 2021


Roof profiles


Name	Scheme	Thickness [mm]	Weight [kg/m ²]	Production length [m]	Enveloped width [mm]	Accessories
Trapeza® 20/137,5T		0,40	3,57	2 - 14 ^A	1250	
		0,50	4,46			
		0,60	5,35			
		0,63	5,62			
		0,70	6,24			
		0,75	6,69			
		0,80	7,14			
		0,88	7,85			
		1,00 ^C	8,92			
Trapeza® 35/207T		0,40	3,79	2 - 14 ^A	1250	
		0,50	4,74			
		0,60	5,69			
		0,63	5,97			
		0,70	6,64			
		0,75	7,11			
		0,80	7,58			
		0,88	8,34			
		1,00	9,48			
Trapeza® 40S/160T		0,40	4,09	2 - 15 ^B	1250	
		0,50	5,11			
		0,60	6,13			
		0,63	6,44			
		0,70	7,15			
		0,75	7,67			
		0,80	8,18			
		0,88	8,99			
		1,00	10,22			
1,25	12,78					
Sofline 40S/160		0,40	4,09	max. 6 m ^C	1250	
		0,50	5,11			
		0,60	6,13			
		0,63	6,44			
		0,70	7,15			
		0,75	7,67			
		0,80	8,18			
		0,88	8,99			
		1,00	10,22			
1,25	12,78					


^A Production lengths for th. 0,40 and 0,50 mm must be consulted

^B Production length for th. 0,50 mm is 2 - 6 m

^C Production possibilities must be consulted

 Anti-condensation treatment
 F1, F2 - application side

 Translucent profile

 Perforations

Contact us

construction.arcelormittal.com/cz-cz

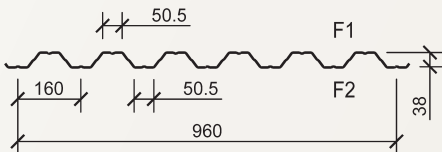

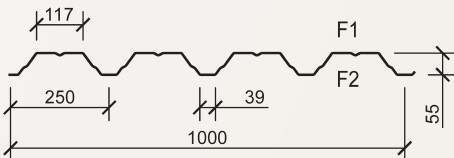




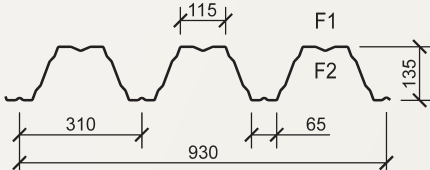



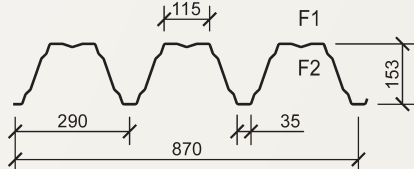



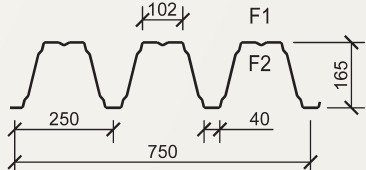





ArcelorMittal Construction Czech Republic
 Sokolovská 192/72, 186 00 / Praha

ArcelorMittal Construction Slovakia

Manufacturing program Senica 2021


Roof deck profiles

Name	Scheme	Thickness [mm]	Weight [kg/m ²]	Production length [m]	Enveloped width [mm]	Accessories
Trapeza® 40/160T		0,40	4,09	2 - 15 ^B	1250	
		0,50	5,11			
		0,60	6,13			
		0,63	6,44			
		0,70	7,15			
		0,75	7,67			
		0,80	8,18			
		0,88	8,99			
		1,00	10,22			
		1,25	12,78			
Trapeza® 55/250T		0,60	5,89	2 - 14	1250	   
		0,63	6,18			
		0,70	6,87			
		0,75	7,36			
		0,80	7,85			
		0,88	8,64			
		1,00	9,81			
		1,25	12,27			
Hacierco® 135/310		0,75	9,50	2 - 16,5 ^D	1500	  
		0,88	11,14			
		1,00	12,66			
		1,13	14,31			
		1,25	15,83			
		1,50	18,99			
Hacierco® 153/290		0,75	10,15	2 - 16,5	1500	  
		0,88	11,91			
		1,00	13,53			
		1,13	15,29			
		1,25	16,92			
		1,50	20,30			
Hacierco® 160/250 HL		0,75	11,78	2 - 16,5	1500	  
		0,88	13,82			
		1,00	15,70			
		1,13	17,74			
		1,25	19,63			
		1,50	23,55			


^B Production length for th. 0,50 mm is 2 - 6 m


^D Production length for th. 1,50 mm is 5 - 16,5 m

^E Anti-condensation treatment is not possible for th. 1,25 and 1,50 mm

 Anti-condensation treatment
F1, F2 - application side

 Perforations

 Translucent profile

 Fire certificate

Contact us

construction.arcelormittal.com/cz-cz

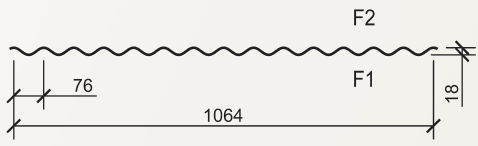



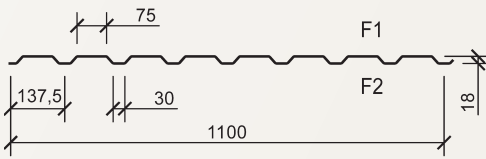
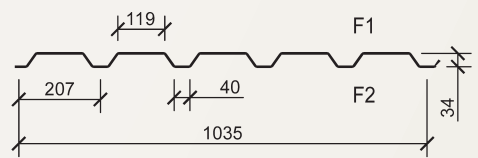
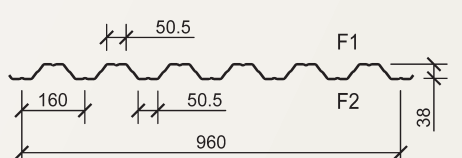
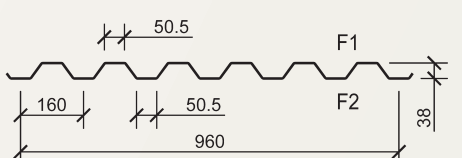





ArcelorMittal Construction Czech Republic
Sokolovská 192/72, 186 00 / Praha

ArcelorMittal Construction Slovakia

Manufacturing program Senica 2021


Traditional wall profiles


Name	Scheme	Thickness [mm]	Weight [kg/m ²]	Production length [m]	Enveloped width [mm]	Accessories	
Frequence® 18/76		F2	0,40	3,69	2 - 14 ^A	1250	 F1, F2  
		F1	0,50	4,61			
			0,60	5,53			
			0,63	5,81			
			0,70	6,46			
			0,75	6,92			
			0,80	7,38			
			0,88	8,12			
			1,00	9,22			
		Trapeza® 20/137,5		F1			
F2	0,50			4,46			
	0,60			5,35			
	0,63			5,62			
	0,70			6,24			
	0,75			6,69			
	0,80			7,14			
	0,88			7,85			
	1,00 ^C			8,92			
Trapeza® 35/207				F1	0,40	3,79	2 - 14 ^A
		F2	0,50	4,74			
			0,60	5,69			
			0,63	5,97			
			0,70	6,64			
			0,75	7,11			
			0,80	7,58			
			0,88	8,34			
			1,00	9,48			
		Trapeza® 40/160		F1	0,40	4,09	
F2	0,50			5,11			
	0,60			6,13			
	0,63			6,44			
	0,70			7,15			
	0,75			7,67			
	0,80			8,18			
	0,88			8,99			
	1,00			10,22			
	1,25			12,78			
Trapeza® 40S/160		F1	0,40	4,09	2 - 15 ^B	1250	 F2  
		F2	0,50	5,11			
			0,60	6,13			
			0,63	6,44			
			0,70	7,15			
			0,75	7,67			
			0,80	8,18			
			0,88	8,99			
			1,00	10,22			
			1,25	12,78			


^A Production lengths for th. 0,40 and 0,50 mm must be consulted

^B Production length for th. 0,50 mm is 2 - 6 m

^C Production possibilities must be consulted

 Anti-condensation treatment
 F1, F2 - application side

 Perforations

 Translucent profile

Contact us

construction.arcelormittal.com/cz-cz

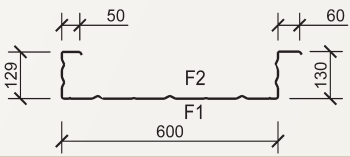


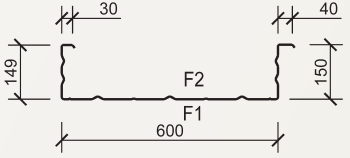


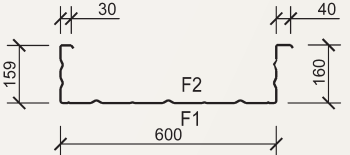




ArcelorMittal Construction Czech Republic
 Sokolovská 192/72, 186 00 / Praha

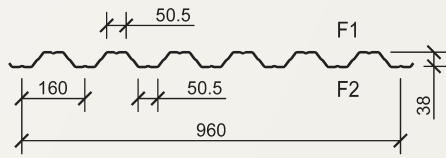

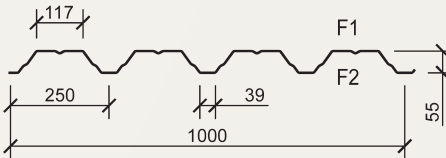

ArcelorMittal Construction Slovakia

Manufacturing program Senica 2021

Wall liner trays

Name	Scheme	Thickness [mm]	Weight [kg/m ²]	Production length [m]	Enveloped width [mm]	Accessories
Hacierba® 130/600		0,75 ^C	9,81	2 - 12 ^F	1000	 
		0,88	11,51			
		1,00	13,08			
		1,25	16,35			
Hacierba® 150/600		0,75 ^C	9,81	2 - 12 ^F	1000	 
		0,88	11,51			
		1,00	13,08			
		1,25	16,35			
Hacierba® 160/600		0,75 ^C	10,01	2 - 12 ^F	1020	 
		0,88	11,74			
		1,00	13,35			
		1,25	16,68			


Lost shuttering


Name	Scheme	Thickness [mm]	Weight [kg/m ²]	Production length [m]	Enveloped width [mm]	Accessories
Cofrasol 40/160		0,40	4,09	2 - 15 ^B	1250	 F2
		0,50	5,11			
		0,60	6,13			
		0,63	6,44			
		0,70	7,15			
		0,75	7,67			
		0,80	8,18			
		0,88	8,99			
		1,00	10,22			
		1,25	12,78			
Cofrasol 55/250		0,60	5,89	2 - 14	1250	 F1, F2
		0,63	6,18			
		0,70	6,87			
		0,75	7,36			
		0,80	7,85			
		0,88	8,64			
		1,00	9,81			
		1,25	12,27			


^B Production length for th. 0,50 mm is 2 - 6 m

^C Production possibilities must be consulted

^F Production lengths for th. 1,25 mm is 3 - 12 m

 Anti-condensation treatment
F1, F2 - application side

 Perforations

 Fire certificate

Contact us

construction.arcelormittal.com/cz-cz



ArcelorMittal Construction Czech Republic
Sokolovská 192/72, 186 00 / Praha