




Trapeza® Plus



ArcelorMittal

PIR composite panel

Geel (BE)

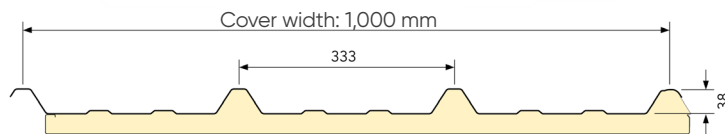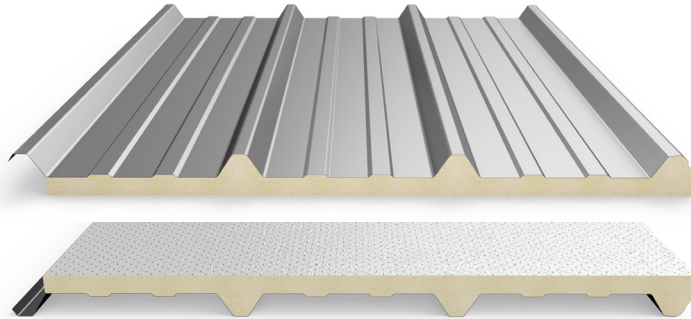

Standard :
0.45 mm (steel) / 0.05 mm (aluminium)
Other thicknesses available :
0.60 mm (steel) and 0.45 mm (steel)

Minimum length: 2,500 mm
Maximum length: 15,500 mm

Shorter lengths up to 200 mm are available on request.

De-foaming

80, 100, 150, 200 and 300 mm

Thermal properties

λ (W/m.K) T= 10°C	0,0225			
Thickness (mm)	Surface mass (kg/m ²)	U _p W/(m ² .K)	U _c W/(m ² .K)	ψ W/(m.K)
30	8.00	0.64	0.64	0.004
40	8.70	0.50	0.50	0.002
60	10.10	0.34	0.34	0.001

Up and Uc values are calculated according to ISO 13789, Ψ according to ISO 10211.