

1003 B

(Austrian production)



- 1 Sealing tape
- 2 Sealing strip
- 3 Fixing
- 4 Hardened foam (CFC-free)

Panel thc.	1003 B	
	U value according to EN 14509	Panel weight
mm	W/m ² K	kg/m ²
50	0,459	12,3
60	0,374	12,9
80	0,276	13,8
100	0,220	14,7
120	0,183	15,9

for standard sheet thickness 0.63/0.5 mm

1003 B					
1000 mm, min. 0,50/0,40 mm					
Fire resistance (wall) according to EN 13501-2 EN 1364-1 ČSN EN 73 0810	EI 15 DP3 (i→o)		EI 30 DP3 (i→o)		Reaction to fire according to EN 13501-1 B-s2,d0
	Panel thc.	vert.	horiz.	vert.	
100 mm	4,0 m	4,0 m	4,0 m	4,0 m	
120 mm	4,0 m	4,0 m	4,0 m	4,0 m	

Note: Spans have to be consulted.

For a different fire resistance requirement, please contact us.

Standard colors:


Exterior (Hairplus 25):




Other colors available on request

PIR FACADE PANEL

(visible fixation)



PROFILING

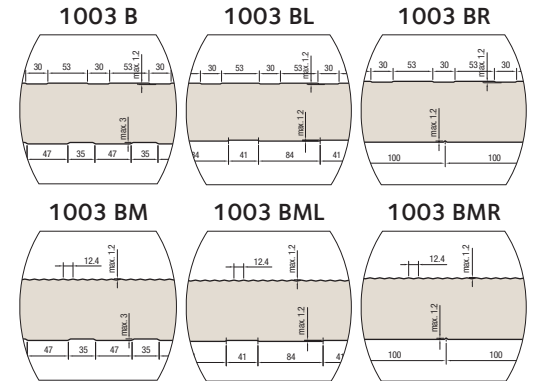

THE PANEL STRUCTURE

External and internal facing is made of ZN or ZM steel with th. 0.40, 0.50, 0.63 mm according to EN 10 147.

INSULATION CORE

Hardened PIR foam

TOLERANCE

according to EN 14509

Interior (Interieur 12):

